arXiv:1207.1791v3 [physics.soc-ph] 16 Jul 2012

Space filling in the World Trade Web: measures and null models

Franco Ruzzenenti
Center for the Study of Complex Systems, University of di Siena, Via Roma 56, 53100 Siena (Italy) and
Department of Chemistry, University of di Siena, Via Aldo Moro 1, 53100 Siena (Italy)[*]

Francesco Picciolo
Department of Chemistry, University of di Siena, Via Aldo Moro 1, 53100 Siena (Italy)[*]

Diego Garlaschelli
Instituut-Lorentz for Theoretical Physics, Leiden Institute of Physics,
University of Leiden, Niels Bohrweg 2, 2333 CA Leiden (The Netherlands)

Riccardo Basosi
Department of Chemistry, University of di Siena, Via Aldo Moro 1, 53100 Siena (Italy)[*] *and*
Center for the Study of Complex Systems, University of di Siena, Via Roma 56, 53100 Siena (Italy)
(Dated: July 18, 2012)

It is here proposed global and local, bynary and weighted measures of *space filling*, to detect the degree of stretching of a network within its embedding space. Measures are normalized indexes that vary from zero - a maximally shrunk network, to one -a maximally expanded network. We evaluated the indexes according to three different null models an propose an unbiased measure of network filling, suitable for confrontation of different (cross sectional) embedded networks or historical trends of the same network. We further develop a local measure of filling and thereby of vertex assortativity. Finally, we showed that in the WTW metric distances seem to have determined the links' allocation more than the present null models tend to have predicted and that this burden upon links has been changing in time. However, surprisingly, our analysis seems to indicate that during *globalization* the WTW expanded merely because of topology and contrary to expectations it actually shrunk.

INTRODUCTION

In recent years transport networks have prooved to be an insightful approach to some prominent and apparently unrelated scientific questions concerning the size and the form of recurrent structures in Nature [1–4]. The ubiquitous allometric scaling law or the shape of some living and non-living systems have been demonstrated to be the result of efficient and optimized transport networks [5–10]. More broadly, in the field of ecology, networks have been already approached as transport systems [11, 12]. Indeed, the study of complex networks too has a long and successful record, that fostered progress in several different disciplines [13–17]. More recently, network theory has been applied to the study of transport networks in ecology [18, 19] and to the study of some cargo shipments and flights [20, 21]. However, so far, statistical mechanics of networks has never been extensively applied to the study of transport networks. A transport network is a network embedded in an metric space, where vertexes can be positioned at fixed coordinates or free to move. In this paper we propose a method to study, by means of a statistical mechanics approach, to what extent an embedded network, with fixed vertexes, *fills* its embedding space.

DEFINITIONS

In a binary, directed and embedded network a given number of links L can be placed in between close or far apart vertexes. In the former case the network tends to be contracted and in the the latter tends to be stretched across its emebbedding space, or to *fill* it. Metric distances in an embedded network are defined for every dyad (coulpe of nodes) and they can be orderly arranged from the smallest to the largest, for all the possible $n(n-1)$ combinations, and *vice versa*: $d^{\downarrow} \equiv (d_1, d_2 ... d_{n(n-1)})$ where $d_1 = d_2 \leq d_3 = d_4 \leq .. d_{n(n-1)}$ and $d^{\uparrow} \equiv (d_1, d_2 ... d_{n(n-1)})$ where $d_1 = d_2 \geq d_3 = d_4 \geq .. d_{n(n-1)}$. Links' placement can therefore span between two extremes, the vector of the minimal distances or the vector of the maximal distances: $\min \equiv \sum_i^L d_i^{\downarrow}$ and $\max \equiv \sum_i^L d_i^{\uparrow}$. Summation over all the possible *occupied* distances goes from 1 to L as this is the number of links defining the graph G^* and, as it will be clearer later, it is also the expected number of links of the conjugated null model(s); thus, the constrain generating the graph ensemble G. It is thereby proposed global index of the space *filling* of an embedded network:

$$f \equiv \frac{\sum_{i \neq j} a_{ij} d_{ij} - \min}{\max - \min} \tag{1}$$

where a_{ij} are the entries of the adjacency matrix. For any given number of links L this index can vary between

0 and 1, where the two extremes stand for a maximally *shrink* and a maximally *expanded* network. It is noteworthy that this index does not depend on the euclidean dimension of the embedding space, nor it depends on the topology of the network or the shape of the two (three) dimensional embedding object, whose boundaries are delimited by the peripheral (outer) vertexes. It is further possible to derive a definition of *network filling* for the weighted matrix. If we intend weights as multiple links of unitary weight, whose statistical properties are described by a Bose-Einstein distribution [22], the two extremal configurations become: the whole weight W placed upon the closest dyad or the farthest. The weighted filling index would thus be:

$$f^w \equiv \frac{\sum_{i \neq j} w_{ij} d_{ij} - W d^{min}}{W(d^{max} - d^{min})} \tag{2}$$

where:

$$W = \sum_{i \neq j} w_{ij}$$

Null Models

The definition of network filling as expressed in equation 1 assumes that links can be freely allocated in the network, that is, that there is a constant probability $p_{ij} = p$ of a linked to be formed between any dyad [13**?**]. Therefore, the conjugated null model is described by the following Hamiltonian:

$$H_1(G) \;=\; \theta L(G) = \theta \sum_{i \neq j} a_{ij}(G)$$

However, real networks are much more heterogeneous and featured by power law distributions of the main topological properties. Scale free networks, for example, have a broad distribution of in and out degree [16]. Therefore, we want to measure the 1 in such a way that the real degree distribution in the network is preserved by the links rewiring. That is to say, we want that each vertex' contribution to the maximal or minimal *link's length* is to be consistent with the observed topology. In this latter case the underlying *null model* is the *directed configuration model*, defined by the enforcement of both the in-degree and the out-degree sequences $\{k_i^{in}\}$ and $\{k_i^{out}\}$ as constraints [23–25]:

$$H_2(G) = \sum_i \left[\theta_i^{in} k_i^{in}(G) + \theta_i^{out} k_i^{out}(G)\right]$$

A null model tells us what are the trivial (maximally entropic) properties of the graph ensemble obtained by imposing determined constrains into the hamiltonian. We can thus compare our observed properties to the excepted ones in order to set a level of *triviality* in the network for the detected property. That is to say: we can disentangled the property under investigation from other topological effects. In what follows every network, regardless of its topological features can be compared with one other. Moreover, a network can be detected along its evolution in time. This latter method was proposed to investigate the *reciprocity* in binary networks, where link density decisively affects the probability of mutual links [26] to form. The observed value can be confronted with the expected value according to a specified rewiring algorithm according to the following relation:

$$\phi \equiv \frac{f - f^{rand}}{1 - f^{rand}} \tag{3}$$

Hitherto, σ varies from -1 to 1 and it scores 0 whenever the observed filling coincides with the expected filling, according to the specified model. It is interesting that according the Hamiltonian defined in equetion 3 and to the one defined in equation 3, the conditional probability of a link to reciprocate another link is constant [24]. However, in a network where distances have a positive or negative effect upon vertex' connecting decisions, the conditional probability of links would arguably be affected. It is very likely that distances would possibly increment the symmetry of the entries of the adjacency matrix. It is therefore of our interest to require that the ensemble of our null model is to be symmetrical under *link reversal* permutation. One way to achieve this latter symmetry is to impose the *reciprocal* degree sequence to the ensemble:

$$\begin{aligned} H_3(G) \;&=\; \sum_i \left[\theta_i^{in} k_i^{in}(G) + \theta_i^{out} k_i^{out}(G) + \theta_i^{\leftrightarrow} k_i^{\leftrightarrow}(G)\right] \\ &=\; \sum_{i \neq j} (\theta_i^{out} + \theta_j^{in}) a_{ij}(G) + \sum_{i<j} (\theta_i^{\leftrightarrow} + \theta_j^{\leftrightarrow}) a_{ij}(G) a_{ji}(G) \end{aligned}$$

Finally, it might be interesting to evaluate a third kind of null model, still symmetrical to *transpose equivalence*, but less restrictive compared to the former one (equation 4). This model relaxes the constrains on every vertex' reciprocal degree, but preserves the reciprocity structure of the network across the ensemble *globally*:

$$\begin{aligned} H_4(G) \;&=\; \sum_i \left[\theta_i^{in} k_i^{in}(G) + \theta_i^{out} k_i^{out}(G) + \theta_0 r(G)\right] \\ &=\; \sum_{i \neq j} (\theta_i^{out} + \theta_j^{in}) a_{ij}(G) + \theta_0 \sum_{i \neq j} a_{ij} a_{ji} \end{aligned}$$

This latter model is interesting because there are some networks, like the World Trade Web, that present a uniform conditional probability, as it has been shown that the reciprocated degree is proportional to total degree for every vertex [25] and that this relations has bee steady over time.

Local filling and assortativity

From the analysis of the weighted matrix it is further possible to derive a *local network filling*, inward and outward, and thereby a *in* and *out assortativity*. Assortativity is a measure of the tendency of vertexes with determined common topological properties to connect with one other [27]. If we define a $\min^{loc} \equiv \sum_i^{L/n} d_i^{\downarrow}(\sum_j w_{ij} + \sum_j w_{ji})$ and $\max^{loc} \equiv \sum_i^{L/n} d_i^{\uparrow}(\sum_j w_{ij} + \sum_j w_{ji})$, where the summation over the distances neds at L/n as this latter is the expected number of links according to the conjugated null model, the Weigthed Random Graph [28].

We thereby proposed the following measure for the local filling:

$$l^{out}(i) \equiv \frac{\sum_j a_{ij} d_{ij} - \min^{loc}}{\max^{loc} - \min^{loc}} \tag{4}$$

and a weighted version:

$$l_w^{out}(i) \equiv \frac{\sum_j a_{ij} d_{ij} - W \min^{loc}}{W(\max^{loc} - \min^{loc})} \tag{5}$$

and the (out) *assortativity*:

$$A^{out}(i) \equiv \frac{\sum_j w_{ij} l_j^{out}}{\sum_j w_{ij}} \tag{6}$$

In figures 1 and 4 are plotted the observed assortativity and the in/out degree in the World Trade Web compared to the predicted assortativity according to the Weighted Configuration Model [29].

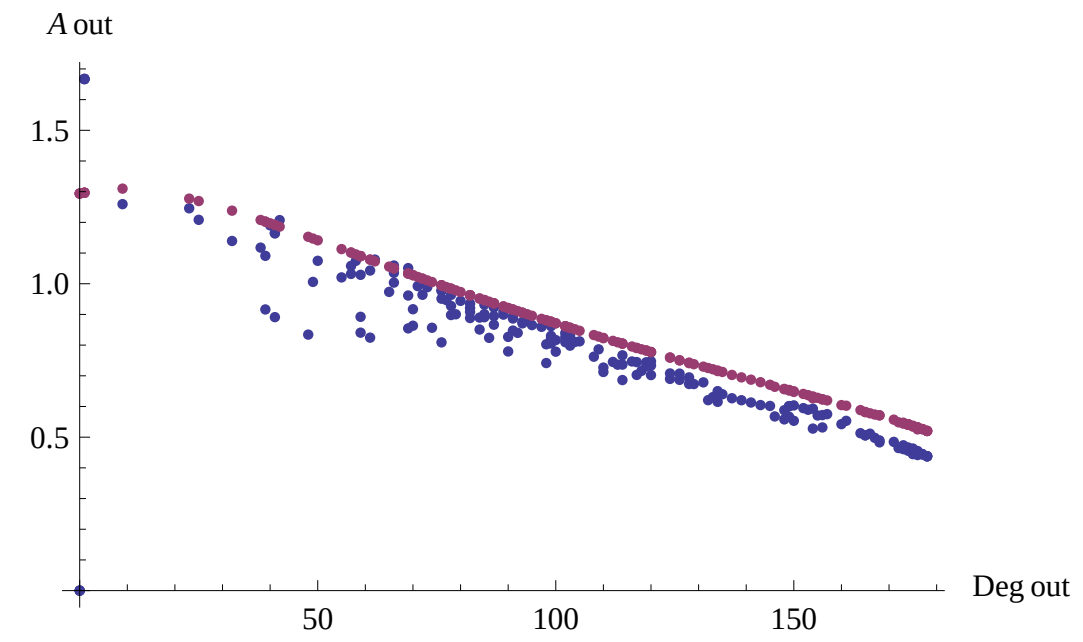

FIG. 1: *Out − assortativity* and *out − degree*, in the binary WTW (Year 2000), observed (Blue)and predicted with DCM(Red).

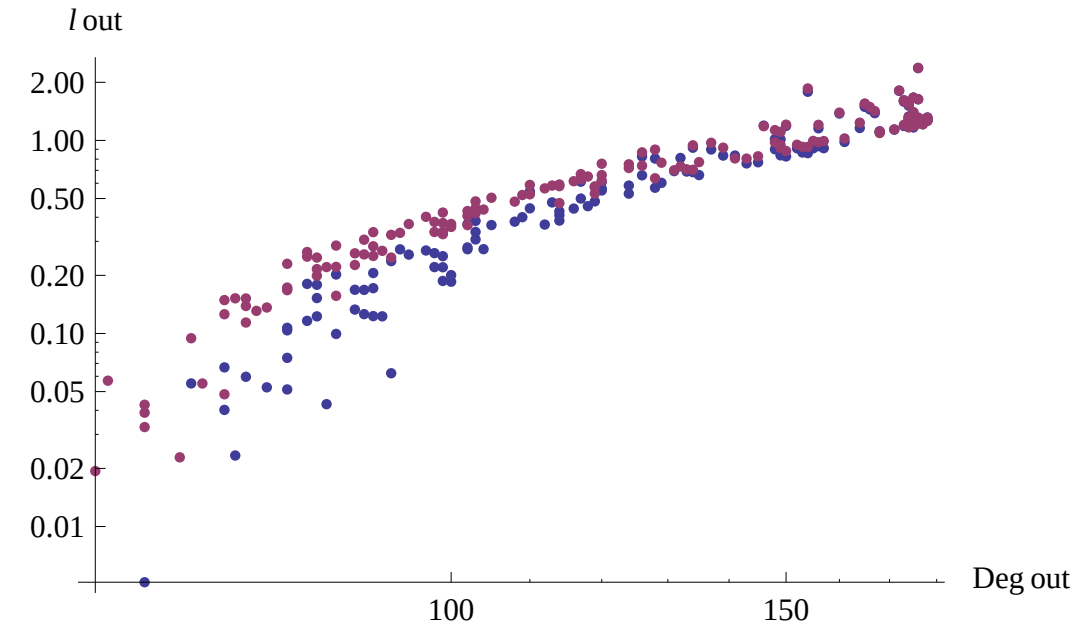

FIG. 2: Local *out−filling* and *out−degree*, in the binary WTW (Year 2000), observed (Blue) and predicted with DCM(Red).

RESULTS

We have evaluated the network filling for the (binary and weighted) World Trade Web (data source: UN COMTRADE). The WTW, exhibits a constant growing trend in volume and connectance, from 86 vertexes and a 0.39 link density in 1950 to 187 and 0.57 in 2000. Interestingly, the average distance and variance have been pretty stable all over the time, going from 7516 and $2.3*10^7$ Km in 1950, to 7550 and $1.9*10^7$ Km in 2000. However, network filling was not steady and shows a growing trend in the time that goes from the late 1950s to the late 1970s and a following decreasing trend (figure 5). Surprisingly it seems that during globalization the network actually shrunk. Nevertheless, it should be noted that the spatial expansion of the WTW seems to coincide with the sudden and unexplained leap in *reciprocity* occurred in the WTW during the lag of time that goes from the late 1980s onward [25]. This is noteworthy because, in spite of the fact that the directed configuration model well explains most of the topological properties of the WTW, reciprocity remains unexplained [30]. Furthermore, as was previously highlighted, reciprocity arguably affects, or it is affected by metric distances of dyads. Therefore, it might be possible that including the reciprocity structure locally (H_3) or globally (H_4) is to be enlightening in some way. In figure 5 the four null models collapse into two, indicating on the one hand that null models based on one global parameter (H_1 and H_3)tend to behave very similarly; on the other hand that the local reciprocity structure (H_4) does not add significant information to the ensemble in order to explain the space filling compared to the degree sequence (H_1). However, surprisingly, both these two latter null models indicate that the space filling, discounted of the topological effects, actually increased during the previously mentioned lag of time, as depicted in figure 6. That is to say, after late 1980s, the WTW expanded and this phenomenon was arguably caused by a change in the topology rather than other factors affecting trades. Interestingly, the weighted filling of the WTW seems to display the same opposite trend: a sudden collapse in the weighted filling is detectable during the period late 1970s early 1990s (figure 7). Hence, while the binary structure of the network expanded, but merely because of its topology, the weighted shrunk. This apparent dichotomy is interesting in the light of the divergent results of the binary an weighted (out) assortativity. Despite locally the weighted and binary version of the graph behave similarly (figures 2 and 4), the weighted graph is assor-

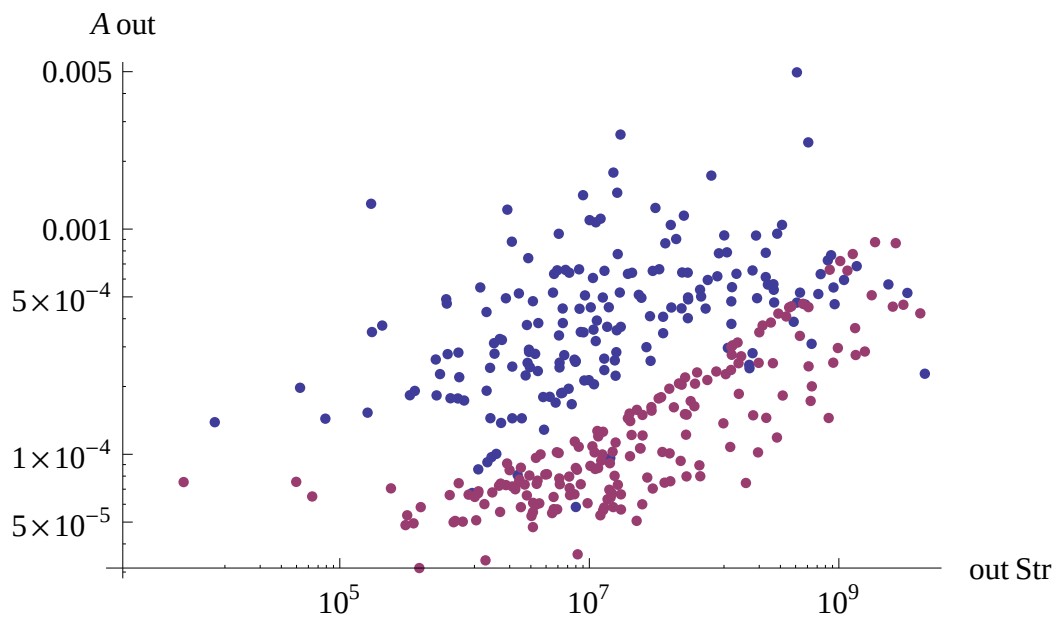

FIG. 3: $Out - assortativity$ and $out - strenght$, in the weighted WTW (Year 2000), observed (Blue) and predicted with WCM (Red).

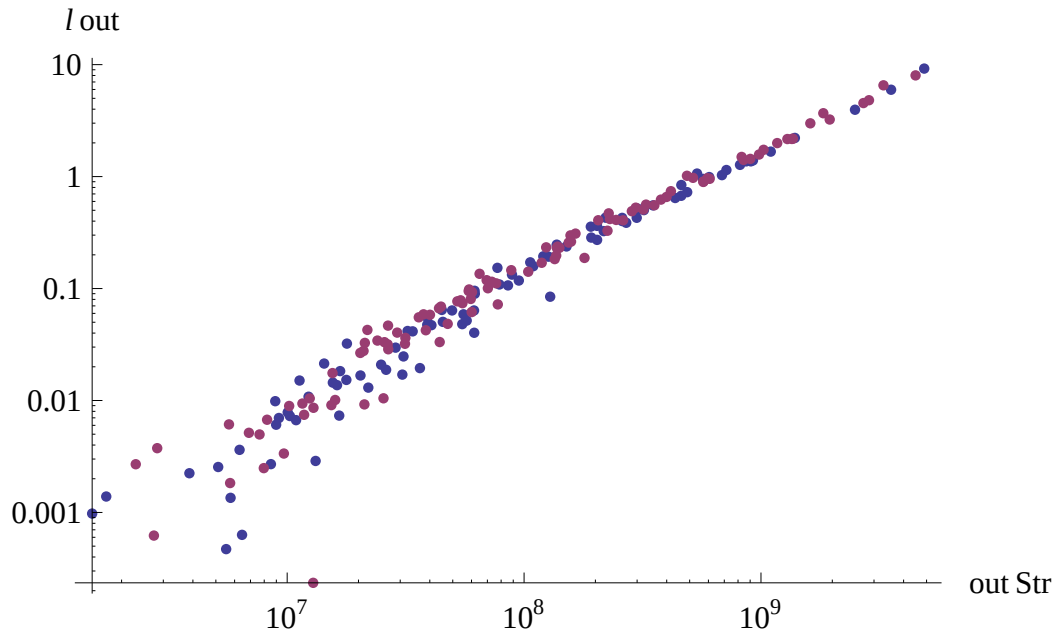

FIG. 4: Local $out - filling$ and $out - strenght$, in the weighted WTW (Year 2000), observed (Blue) and predicted with WCM (Red).

tative whereas the binary representation is disassortative (figures 1 and 3). That is, though far apart (peripheral in the metric space) vertexes tend to be connected with hubs (central vertexes in the topological space), vertexes hilly connected tend to place their weights prominently with closed (neighbours) vertexes.

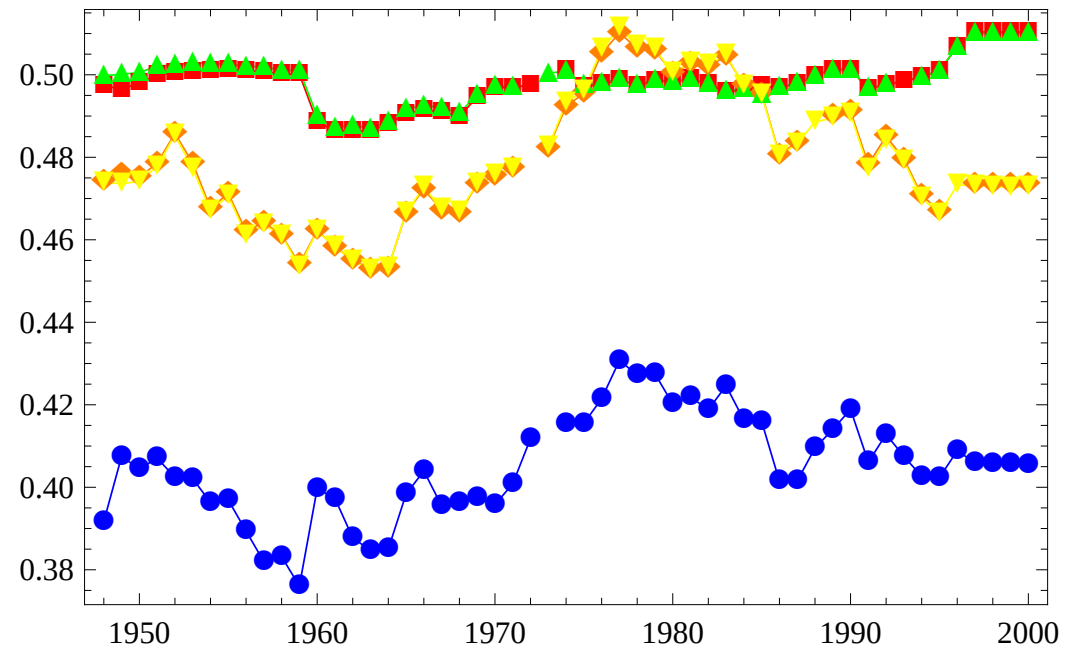

FIG. 5: Expected and observed space filling in the WTW: H_1 (red), H_2 (orange), H_3 (yellow), H_4 (green) and observed f^* (blue)

A further interesting result of the analysis is that all the four null models evaluated tend to over estimate the value of network filling for the WTW. The WTW should be a *shrunk* network, where distances pose a significant burden over trade decisions. There is a long standing debate in literature over the role of distances in trades [31, 32] and more recently, Fagiolo tested the effect of distances on the topology of the WTW [33]. Our results seem to confirm previous findings, in this respect. Nevertheless, it must be noted that locally both the WCM and the DCM, though still overestimating the space filling, are more accurate, signalling once again that it is the global structure of the WTW that has a paramount effect on the degree of space filling of the network. We have also investigated the effect of distances on different scales of the network. In Table I it is shown that the European transportation network (data source: EUROSTAT) is more spatially expanded than the world wide network, whilst on a national scale, for the case of Italy (data source: ISTAT), the network seems to be significantly shrunk ($\phi = -0.142$). This picture gives the impression of a (binary) network where distances count more on a local scale than a global scale, but this result might be significantly affected by the sources of data and more research is needed.

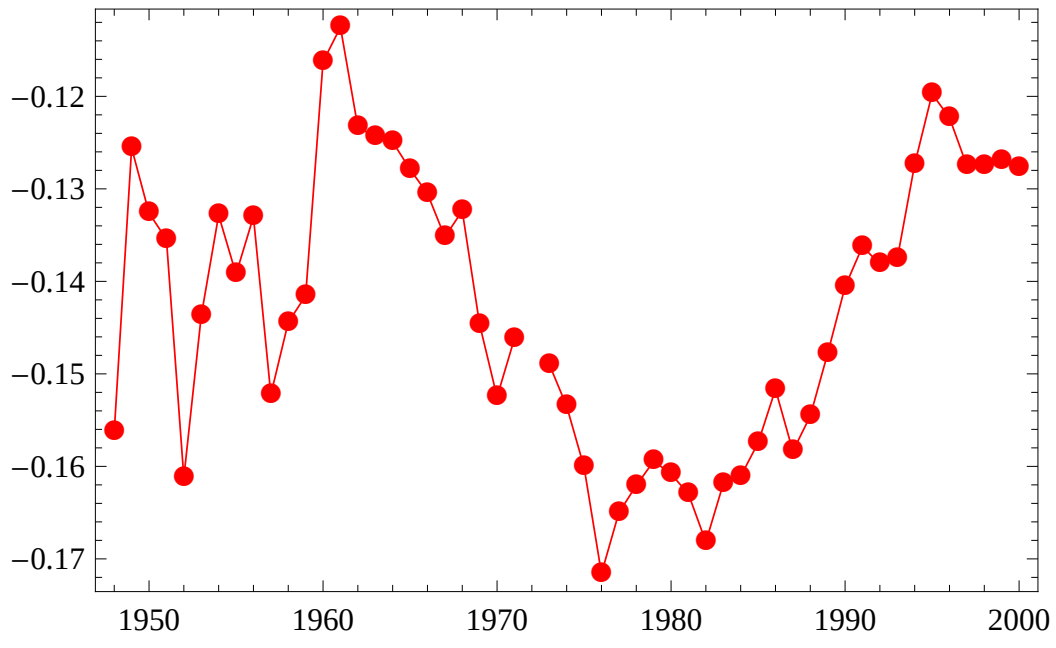

FIG. 6: Global ϕ evaluated according to the Reciprocated DCM (H_4)

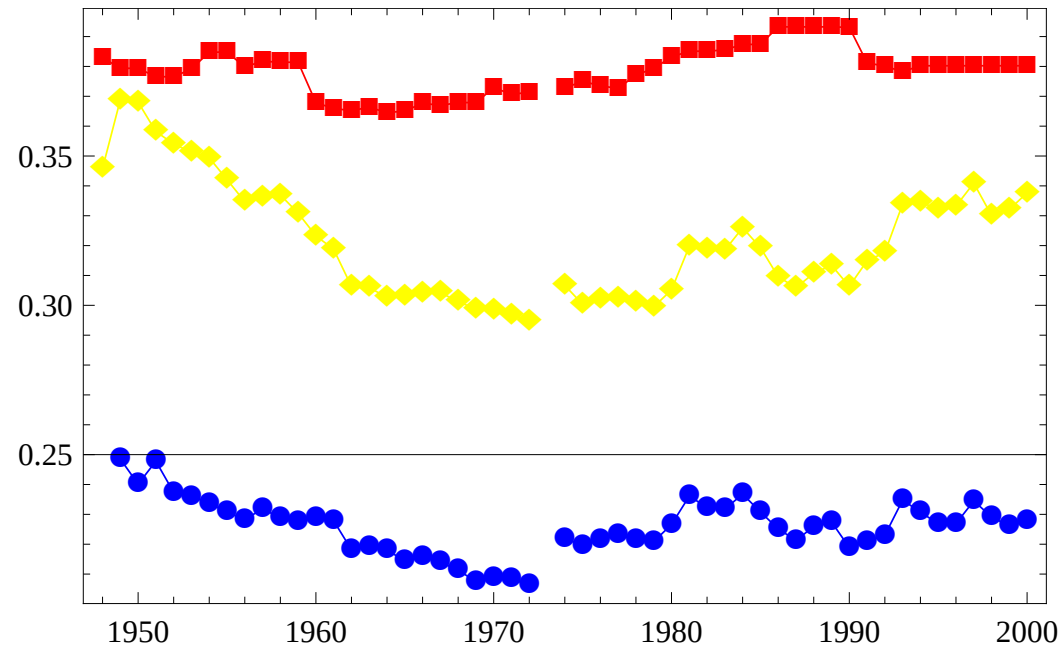

FIG. 7: Weighted filling in the WTW: observed (blue),WCM (yellow), WRG (red)

TABLE I: Space filling in transport networks

	WTW (2000)	EU 15 (2000)	Italy (2010)
Link density	0.578	0.819	0.844
f	0.578	0.458	0.377
ϕ (CM)	0.380	0.134	-0.142
f^w	0.228	0.379	0.328

CONCLUSIONS

We have here proposed a possible measures to detect the *space filling*, that is to say the extent of stretching, of a space embedded network and confronted this with four different null models, in order to develop an improved version of the index. Despite the rough version of the index seems to indicate that during globalization the network, contrary to expectations, contracted, the improved version, discounting topological effects, suggest that the WTW expanded significantly after the late 1980s. Our analysis further shows that reciprocity is undeniably connected to the space filling, though it does not explain it. It is arguably possible that the same unknown phenomenon that affected globally the reciprocal structure of the WTW also caused its spatial expansion. This hypothesis is further confirmed by the local analysis of the space filling, that is fairly well described and explained, contrary to the global analysis, by the considered null models. We have to deduce, therefore, that this unknown phenomenon was global and structural, yet more research is needed to detect it.

DG acknowledges support from the Dutch Econophysics Foundation (Stichting Econophysics, Leiden, Netherlands) with funds from beneficiaries of Duyfken Trading Knowledge BV, Amsterdam, The Netherlands. RB acknowledges support from the FESSUD project on ”Financialisation, economy, society and sustainable development”, Seventh Framework Programme, EU. We would also like to thank Tiziano Squartini for his kind contribution.

---

* ruzzenenti@unisi.it

[1] G. B. West, J. H. Brown, and B. J. Enquist, Science **284** (1999).

[2] G. B. West, J. H. Brown, and B. J. Enquist, Nature **413** (2001).

[3] L. M. A. Bettencourt, J. Lobo, D. Helbing, C. Khnert, and G. B. West, PNAS **104** (2007).

[4] A. Bejan and S. Lorente, Philosophical Transactions of the Royal Society B: Biological Sciences **365**, 1335 (2010), ISSN 1471-2970, URL `http://dx.doi.org/10.1098/rstb.2009.0302`.

[5] J. R. Banavar, A. Maritan, and A. Rinaldo, Nature **399** (1999).

[6] G. B. West, J. H. Brown, and B. J. Enquist, Science **276** (1997).

[7] D. Queiros-Conde, J. Bonjour, W. Wechsatol, and A. Bejan, Physica A: Statistical Mechanics and its Applications **384**, 719 (2007), ISSN 0378-4371, URL `http://www.sciencedirect.com/science/article/pii/S037843710700550X`.

[8] L. Rocha, E. Lorenzini, and C. Biserni, International Communications in Heat and Mass Transfer **32**, 1281 (2005), ISSN 0735-1933, URL `http://www.sciencedirect.com/science/article/pii/S0735193305001399`.

[9] D. P. Bebber, J. Hynes, P. R. Darrah, L. Boddy, and M. D. Fricker, Proc. R. Soc. B **274**, 2307 (2007).

[10] A. Tero, S. Takagi, T. Saigusa, K. Ito, D. P. Bebber, M. D. Fricker, K. Yumiki, R. Kobayashi, and T. Nakagaki, Science **327**, 439 (2010), ISSN 1095-9203, URL `http://dx.doi.org/10.1126/science.1177894`.

[11] R. E. Ulanowicz, *Growth and Development: Ecosystems Phenomenology* (iUniverse, 2000), ISBN 0595001459, URL `http://www.worldcat.org/isbn/0595001459`.

[12] B. Fath, B. PATTEN, and J. Choi, J. theor. Biol. (2001).

[13] P. Erdős and A. Rényi, in *PUBLICATION OF THE MATHEMATICAL INSTITUTE OF THE HUNGARIAN ACADEMY OF SCIENCES* (1960), pp. 17–61, URL `http://citeseerx.ist.psu.edu/viewdoc/summary?doi=10.1.1.153.5943`.

[14] B. Bollobas and A. Thomason, *Random Graphs of Small Order* (Elsevier, 1985), vol. 118 of *North-Holland Mathematics Studies*, pp. 47–97, ISBN 9780444878212, URL `http://dx.doi.org/10.1016/S0304-0208(08)73612-0`.

[15] D. J. Watts and S. H. Strogatz, Nature **393**, 440 (1998), ISSN 0028-0836, URL `http://dx.doi.org/10.1038/30918`.

[16] A.-L. Barabási and R. Albert, Science **286**, 509 (1999), ISSN 1095-9203, URL `http://dx.doi.org/10.1126/science.286.5439.509`.

[17] R. Albert and A. Barabàsi, Review of Modern Physics (2002).

[18] D. Garlaschelli, G. Caldarelli, and L. Pietronero, Nature **423** (2003).

[19] J. Zhang and L. Guo, Journal of Theoretical Biology (2010).

[20] O. Woolley-Meza, C. Thiemann, D. Grady, J. Lee, H. Seebens, B. Blasius, D. Brockmann, O. Woolley-Meza, C. Thiemann, D. Grady, et al., The European Physical Journal B - Condensed Matter and Complex Systems pp. 1–12 (2011), ISSN 1434-6028, URL `http://dx.doi.org/10.1140/epjb/e2011-20208-9`.

[21] P. Kaluza, A. Kölzsch, M. T. Gastner, and B. Blasius, Journal of The Royal Society Interface **7**, 1093 (2010), ISSN 1742-5662, URL `http://dx.doi.org/10.1098/rsif.2009.0495`.

[22] D. Garlaschelli and M. Loffredo, PHYSICAL REVIEW E (2008).

[23] P. Juyong and M. E. J. Newman, PHYSICAL REVIEW E **70** (2004).

[24] D. Garlaschelli, F. Ruzzenenti, and R. Basosi, Symmetry **2**, 1683 (2010), ISSN 2073-8994, URL `http://www.mdpi.com/2073-8994/2/3/1683/`.

[25] F. Ruzzenenti, D. Garlaschelli, and R. Basosi, Symmetry **2**, 1710 (2010), ISSN 2073-8994, URL `http://www.mdpi.com/2073-8994/2/3/1710/`.

[26] D. Garlaschelli and M. Loffredo, Phys. Rev. Lett. (2004).

[27] G. Caldarelli, *Scale-Free Networks: Complex Webs in Nature and Technology* (Oxford University Press, Oxford, 2007).

[28] D. Garlaschelli, New Journal of Physics **11**, 073005 (2009), URL `http://stacks.iop.org/1367-2630/11/i=7/a=073005`.

[29] T. Squartini, G. Fagiolo, and D. Garlaschelli, Physical Review E **84**, 046118+ (2011), URL `http://dx.doi.org/10.1103/PhysRevE.84.046118`.

[30] T. Squartini, G. Fagiolo, and D. Garlaschelli, Physical Review E **84**, 046117+ (2011), URL `http://dx.doi.`

`org/10.1103/PhysRevE.84.046117`.

[31] R. C. Feenstra, J. R. Markusen, and A. K. Rose, The Canadian Journal of Economics / Revue canadienne d'Economique **34**, pp. 430 (2001), ISSN 00084085, URL `http://www.jstor.org/stable/3131862`.

[32] J. E. Anderson and Y. V. Yotov, Working Paper 17835, National Bureau of Economic Research (2012), URL `http://www.nber.org/papers/w17835`.

[33] M. Duenas and G. Fagiolo, LEM Papers Series 2011/25, Laboratory of Economics and Management (LEM), Sant'Anna School of Advanced Studies, Pisa, Italy (2011), URL `http://ideas.repec.org/p/ssa/lemwps/2011-25.html`.